




6.25" 7/8 LOBES 4.8 STAGES

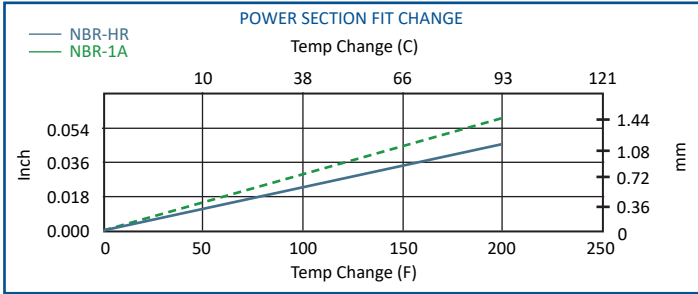

PERFORMANCE SPECIFICATIONS

| | |
|------------------|--------------------------------------|
| Torque Slope | 7.977 ft-lb/psi 1.569 Nm/kPa |
| Flow Range | 150 to 400 GPM 570 to 1510 Litre/min |
| Rotation | 0.330 Rev/Gal 0.087 Rev/Litre |
| Speed Range | 49 to 140 RPM |
| Off Bottom Press | 88 psi 610 kPa |

PERFORMANCE DETAILS

| | NBR - 1A | NBR - HR |
|----------------------------|--------------|---------------|
| Max Diff Press psi (kPa) | 720 (4960) | 1080 (7450) |
| Max Torque ft-lb (Nm) | 5740 (7790) | 8620 (11680) |
| Stall Diff Press psi (kPa) | 1080 (7450) | 1620 (11170) |
| Stall Torque ft-lb (Nm) | 8620 (11680) | 12920 (17520) |
| Max Recommended HP (kW) | 144 (108) | 207 (154) |

