




6-3/4" OR 7" SEALED BEARING



Bit to Center of Stabilizer Blade	A	24 in (0.61 m)
Bit to Bend	B	76 in (1.93 m)
Radius @ Adjusting Ring	C	3.75 in (95 mm)
Max Effective OD of Slick Motor @ Adjusting Ring @ 0°		7.50 in (191 mm)
Max OD of Slick Motor w/Straight Housing		7.13 in (181 mm)
Bit to Max Slick OD w/Straight Housing		51.36 in (1305 mm)
Estimated Total Weight		2850 lbs (1293 kg)
Common Top Connection		4 1/2 REG, 4 1/2 IF, 4 1/2 H-90, 4 1/2 XH, 5 H-90
Common Btm Connection		4 1/2 REG

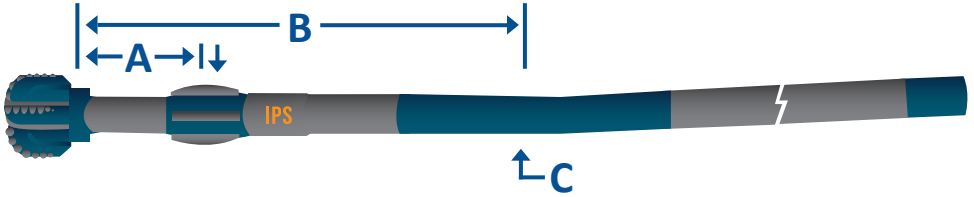

6-3/4" OR 7" SEALED BEARING

PREDICTED BUILD RATES DEGREES/100 FT (30M)

BEND SETTING	SLICK			SINGLE STABILIZER			TWO STABILIZER		
	HOLE SIZE			HOLE SIZE			HOLE SIZE		
Deg	8-1/2	8-3/4	9-7/8	8-1/2	8-3/4	9-7/8	8-1/2	8-3/4	9-7/8
0.39°	1.1	1.1	1.1	1.8	1.9	2.3	1.3	1.3	1.4
0.78°	2.7	2.2	2.1	3.7	3.8	4.2	3.3	3.3	3.3
1.15°	4.7	4.2	3.1	5.5	5.6	5.9	5.2	5.2	5.2
1.50°	6.7	6.2	4.1	7.2	7.3	7.6	7.0	7.0	7.0
1.83°	8.5	8.0	5.9	8.8	8.8	9.1	8.7	8.7	8.7
2.12°	10.1	9.6	7.4	10.2	10.2	10.5	10.1	10.1	10.1
**2.25°	10.8	10.3	8.1	10.8	10.9	11.1	10.8	10.8	10.8
2.38°	11.5	11.0	8.8	11.5	11.5	11.7	11.6	11.5	11.4
2.60°	12.7	12.2	10.0	12.7	12.5	12.8	12.9	12.6	12.6
2.77°	13.7	13.2	10.9	13.7	13.4	13.6	13.9	13.4	13.4
2.89°	14.4	13.8	11.6	14.4	13.9	14.1	14.6	14.1	14.0
2.97°	14.8	14.3	12.0	14.8	14.3	14.5	15.1	14.5	14.4
3.00°	15.0	14.4	12.2	15.0	14.5	14.7	15.3	14.6	14.6