




6 1/2" SEALED BEARING

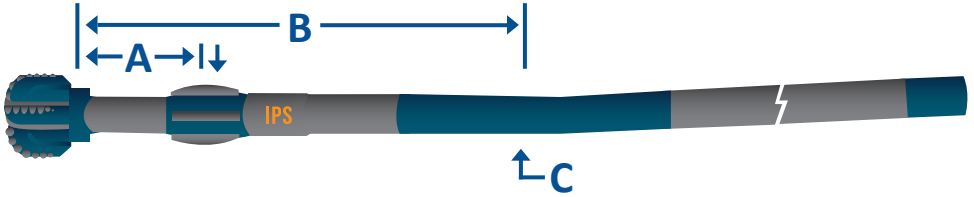

Bit to Center of Stabilizer Blade	A	28 in (0.71m)
Bit to Bend	B	77 in (1.96m)
Radius @ Adjusting Ring	C	3.50 in (89 mm)

Max Effective OD of Slick Motor @ Adjusting Ring @ 0°	7.00 in (178 mm)
Max OD of Slick Motor w/Straight Housing	6.63 in (168 mm)
Bit to Max Slick OD w/Straight Housing	8.90 in (226 mm)

Estimated Total Weight	2040 lbs (925 kg)
Common Top Connection	4 1/2 REG, 4 1/2 IF, 4 1/2 H-90, 4 1/2 XH, 5 H-90
Common Btm Connection	4 1/2 REG



6 1/2" SEALED BEARING

PREDICTED BUILD RATES DEGREES/100 FT (30M)

BEND SETTING	SLICK			SINGLE STABILIZER			TWO STABILIZER		
	HOLE SIZE			HOLE SIZE			HOLE SIZE		
	7-7/8	8-1/2	8-3/4	7-7/8	8-1/2	8-3/4	7-7/8	8-1/2	8-3/4
Deg									
0.39°	1.3	1.3	1.3	2.2	2.6	2.7	1.6	1.6	1.6
0.78°	3.5	2.5	2.5	4.4	4.7	4.8	3.9	3.9	3.9
1.15°	5.9	4.5	4.0	6.5	6.8	6.9	6.1	6.1	6.1
1.50°	8.2	6.8	6.2	8.4	8.7	8.8	8.1	8.1	8.1
1.83°	10.4	8.9	8.4	10.4	10.5	10.6	10.2	10.1	10.1
2.12°	12.3	10.8	10.2	12.3	12.1	12.2	12.2	11.8	11.8
**2.25°	13.2	11.7	11.1	13.2	12.9	12.9	13.1	12.5	12.5
2.38°	14.0	12.5	11.9	14.0	13.6	13.7	14.0	13.3	13.3
2.60°	15.4	13.9	13.3	15.4	14.8	14.9	15.6	14.6	14.6
2.77°	16.6	15.0	14.4	16.6	15.7	15.8	16.7	15.6	15.6
2.89°	17.3	15.8	15.2	17.3	16.4	16.5	17.6	16.3	16.3
2.97°	17.9	16.3	15.7	17.9	16.8	16.9	18.1	16.8	16.8
3.00°	18.1	16.5	15.9	18.1	17.0	17.1	18.3	16.9	16.9