




6 1/4" SEALED BEARING

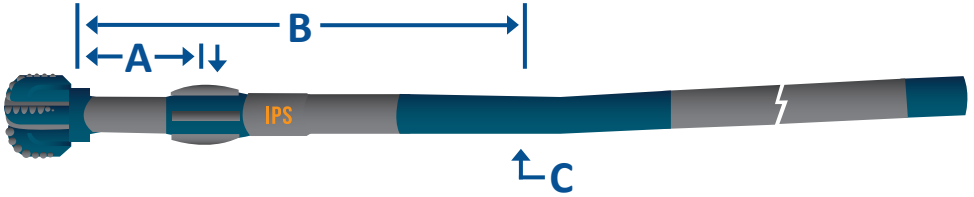

Bit to Center of Stabilizer Blade	A	28 in (0.71 m)
Bit to Bend	B	77 in (1.96 m)
Radius @ Adjusting Ring	C	3.50 in (89 mm)

Max Effective OD of Slick Motor @ Adjusting Ring @ 0°	7.00 in (178 mm)
Max OD of Slick Motor w/Straight Housing	6.63 in (168 mm)
Bit to Max Slick OD w/Straight Housing	8.90 in (226 mm)

Estimated Total Weight	1990 lbs (903 kg)
Common Top Connection	4 1/2 REG, 4 1/2 IF, 4 1/2 H-90, 4 1/2 XH, 5 H-90
Common Btm Connection	4 1/2 REG



6 1/4" SEALED BEARING

PREDICTED BUILD RATES DEGREES/100 FT (30M)

BEND SETTING	SLICK			SINGLE STABILIZER			TWO STABILIZER		
	HOLE SIZE			HOLE SIZE			HOLE SIZE		
	7-7/8	8-1/2	8-3/4	7-7/8	8-1/2	8-3/4	7-7/8	8-1/2	8-3/4
Deg									
0.39°	1.2	1.2	1.2	2.3	2.6	2.7	1.5	1.6	1.6
0.78°	3.5	2.4	2.4	4.4	4.6	4.7	3.8	3.8	3.8
1.15°	5.8	4.5	3.9	6.3	6.6	6.7	5.8	5.8	5.8
1.50°	8.0	6.6	6.1	8.2	8.5	8.6	7.8	7.8	7.8
1.83°	10.1	8.7	8.1	10.1	10.2	10.3	9.7	9.7	9.7
2.12°	11.9	10.5	9.9	11.9	11.8	11.8	11.6	11.3	11.3
**2.25°	12.7	11.3	10.7	12.7	12.5	12.5	12.5	12.1	12.1
2.38°	13.5	12.1	11.5	13.5	13.1	13.2	13.4	12.8	12.8
2.60°	14.9	13.4	12.9	14.9	14.3	14.4	14.8	14.0	14.0
2.77°	15.9	14.5	13.9	15.9	15.2	15.3	16.0	15.0	15.0
2.89°	16.7	15.2	14.6	16.7	15.9	15.9	16.8	15.7	15.7
2.97°	17.2	15.7	15.1	17.2	16.3	16.3	17.3	16.1	16.1
3.00°	17.4	15.9	15.3	17.4	16.4	16.5	17.5	16.3	16.3