




8" SEALED BEARING



Bit to Center of Stabilizer Blade	A	36 in (0.92 m)
Bit to Bend	B	87 in (2.20 m)
Radius @ Adjusting Ring	C	4.19 in (106 mm)
Max Effective OD of Slick Motor @ Adjusting Ring @ 0°		8.38 in (213 mm)
Max OD of Slick Motor w/Straight Housing		8.13 in (207 mm)
Bit to Max Slick OD w/Straight Housing		61.87 in (1571 mm)
Estimated Total Weight		2500 lbs (1134 kg)
Common Top Connection		6 5/8 REG, 7H-90
Common Btm Connection		6 5/8 REG

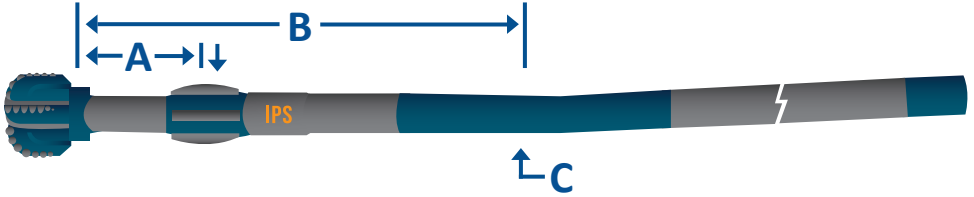

8" SEALED BEARING

PREDICTED BUILD RATES DEGREES/100 FT (30M)

BEND SETTING HOLE SIZE Deg	SLICK			SINGLE STABILIZER			TWO STABILIZER		
	9-7/8	10-5/8	12-1/4	9-7/8	10-5/8	12-1/4	8-1/2	8-3/4	9-7/8
0.39°	1.5	1.4	1.4	3.2	3.7	4.7	1.9	1.9	1.9
0.78°	2.9	2.9	2.8	5.6	6.1	7.0	4.4	4.4	4.4
1.15°	5.7	4.2	4.1	7.8	8.3	9.2	6.8	6.8	6.8
1.50°	8.3	6.6	5.4	10.0	10.4	11.2	9.1	9.1	9.1
1.83°	10.8	9.0	6.5	12.0	12.4	13.2	11.2	11.2	11.2
2.12°	12.9	11.1	7.6	13.8	14.1	14.9	13.1	13.1	13.0
**2.25°	13.9	12.1	8.4	14.6	14.9	15.6	14.0	13.9	13.9
2.38°	14.9	13.0	9.3	15.4	15.7	16.4	14.8	14.8	14.7
2.60°	16.5	14.7	10.9	16.7	17.0	17.7	16.2	16.2	16.1
2.77°	17.8	15.9	12.1	17.8	18.1	18.7	17.3	17.3	17.2
2.89°	18.7	16.8	12.9	18.7	18.8	19.4	18.3	18.1	18.0
2.97°	19.3	17.4	13.5	19.3	19.3	19.9	18.9	18.6	18.5
3.00°	19.5	17.6	13.7	19.5	19.4	20.0	19.2	18.8	18.7