




# 9 5/8" SEALED BEARING



Bit to Center of Stabilizer Blade	A	43 in (1.09 m)
Bit to Bend	B	98 in (2.49 m)
Radius @ Adjusting Ring	C	384 in (9.76 m)
Max Effective OD of Slick Motor @ Adjusting Ring @ 0°		10.00 in (254 mm)
Max OD of Slick Motor w/Straight Housing		9.75 in (248 mm)
Bit to Max Slick OD w/Straight Housing		13.69 in (348 mm)
Estimated Total Weight		5540 lbs (2513 kg)
Common Top Connection		6 5/8 REG, 7 5/8 REG, 7 H-90
Common Btm Connection		6 5/8 REG, 7 5/8 REG

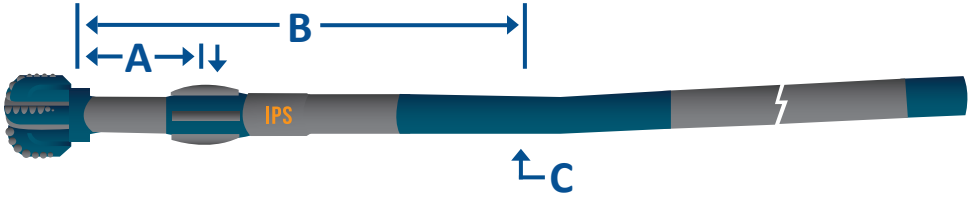

# 9 5/8" SEALED BEARING

## PREDICTED BUILD RATES DEGREES/100 FT (30M)

BEND SETTING HOLE SIZE Deg	SLICK			SINGLE STABILIZER			TWO STABILIZER		
	12-1/4	14-3/4	17-1/2	12-1/4	14-3/4	17-1/2	12-1/4	14-3/4	17-1/2
	0.39°	1.0	1.0	0.9	2.3	3.0	3.7	1.5	1.5
0.78°	2.0	1.9	1.9	4.0	4.7	5.3	3.4	3.4	3.3
1.15°	3.0	2.8	2.7	5.6	6.3	6.9	5.1	5.1	5.1
1.50°	4.8	3.7	3.6	7.2	7.8	8.3	6.8	6.8	6.7
1.83°	6.5	4.5	4.3	8.7	9.2	9.7	8.3	8.3	8.3
2.12°	8.0	5.2	5.0	9.9	10.4	10.9	9.7	9.7	9.6
**2.25°	8.6	5.5	5.3	10.5	11.0	11.4	10.3	10.3	10.2
2.38°	9.3	5.9	5.6	11.1	11.5	11.9	11.0	10.9	10.9
2.60°	10.4	7.0	6.2	12.1	12.5	12.9	12.0	11.9	11.9
2.77°	11.3	7.8	6.6	12.8	13.2	13.6	12.8	12.7	12.7
2.89°	11.9	8.4	6.8	13.3	13.7	14.1	13.4	13.3	13.2
2.97°	12.3	8.8	7.0	13.7	14.1	14.4	13.8	13.7	13.6
3.00°	12.5	9.0	7.1	13.8	14.2	14.5	13.9	13.8	13.8