




4-3/4" SEALED BEARING



Bit to Center of Stabilizer Blade	A	20 in (0.50 m)
Bit to Bend	B	61 in (1.55m)
Radius @ Adjusting Ring	C	2.78 in (71 mm)
Max Effective OD of Slick Motor @ Adjusting Ring @ 0°		5.56 in (141 mm)
Max OD of Slick Motor w/Straight Housing		5.13 in (130 mm)
Bit to Max Slick OD w/Straight Housing		38.12 in (968 mm)
Estimated Total Weight		1220 lbs (553 kg)
Common Top Connection		3 1/2 REG, 3 1/2 IF
Common Btm Connection		3 1/2 REG

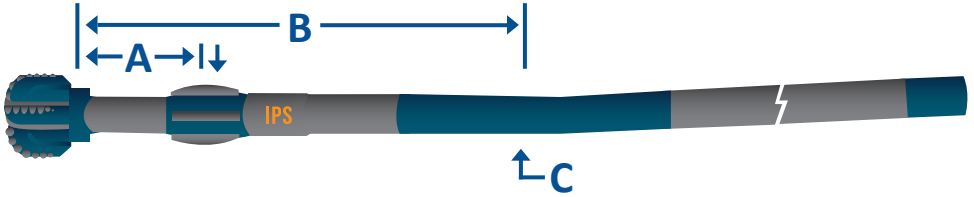

4-3/4" SEALED BEARING

PREDICTED BUILD RATES

DEGREES/100 FT (30M)

BEND SETTING HOLE SIZE	SLICK			SINGLE STABILIZER		
	6	6-1/4	6-3/4	6	6-1/4	6-3/4
0.39°	1.7	1.3	1.3	1.9	2.0	2.3
0.78°	4.4	3.6	2.6	4.4	4.3	4.6
1.15°	6.8	6.1	4.7	6.8	6.5	6.7
1.50°	9.2	8.4	7.0	9.2	8.5	8.7
1.83°	11.4	10.7	9.2	11.4	10.7	10.7
2.12°	13.4	12.6	11.1	13.4	12.6	12.3
**2.25°	14.2	13.5	11.9	14.2	13.5	13.1
2.38°	15.1	14.3	12.8	15.1	14.3	13.9
2.60°	16.6	15.8	14.3	16.6	15.8	15.1
2.77°	17.7	16.9	15.4	17.7	16.9	16.1
2.89°	18.5	17.7	16.2	18.5	17.7	16.8
2.97°	19.1	18.3	16.7	19.1	18.3	17.3
3.00°	19.3	18.5	16.9	19.3	18.5	17.5